

BOL. BOLLY2 WSB/WSC-DF  
POLYWARM®



BOL. BOLLY2 WSB-DF		P. Max
[ ]	ART. NR.	, €
300	3135162320103	10
400	3135162320104	10
500	3135162320105	10

BOL. BOLLY2 WSC-DF		P. Max
[ ]	ART. NR.	, €
(*) 800	3138162320006	10
(*) 1000	3138162320007	8

STORAGE		EXCHANGER	
Pmax	Tmax	Pmax	Tmax
Vedi Tab.	90° C	12 bar	99° C

[ ]	[m2]	[KW]	[min]	[ / .]	[ /10']	[m2]	[KW]	[min]	[ / .]	[ /10']	[Kg]
300	1,58	41,8	24,68	1009,09	468,18	0,60	15,60	18	384	164	118
400	1,9	47,50	28,42	1166,60	594,43	1,10	27,50	17	676	246	129
500	2,62	65,50	25,65	1609,43	768,24	0,90	22,50	21	553	259	150
(*) 800	3,59	89,75	28,41	2204,26	1117,38	1,30	32,50	21	798	383	199
(*) 1000	4,6	115,00	28,91	2825,71	1470,95	1,40	35,00	22	860	477	244

(\*) 800 1000

500

100 mm.

(Anodentester),


Polywarm)

2

Polywarm,

-5

(52 .)

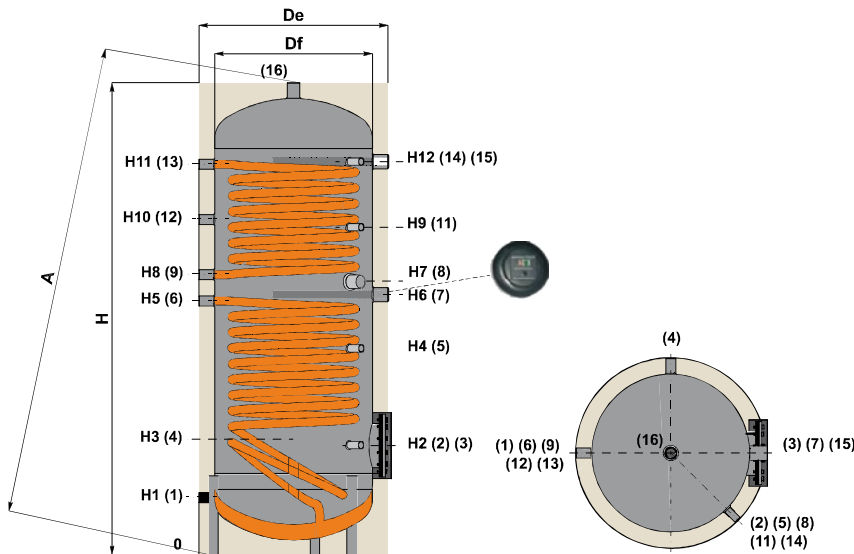

1	
2	1/2"
3	
4	
5	1/2"
6	
7	1"1/4
8	1"1/2
9	
11	1/2"
12	
13	
14	1/2"
15	1"1/4
16	( 800 1000 )

[ ]	Df	De	H	A	H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12	3	1-4-6-9-13-16
[ ]	[mm]																	
300	550	670	1520	1660	210	405	440	715	895	925	965	985	1105	1105	1225	1235	Øi 160	1"
400	600	720	1795	1935	217	415	440	785	965	1010	1050	1065	1245	1275	1485	1495	Øi 160	1"
500	650	790	1835	1200	239	440	460	930	1110	1142	1180	1205	1325	1335	1505	1515	Øi 160	1"
800	750	950	2187	1285	272	482	492	1102	1327	1367	1407	1422	1572	1597	1797	1807	Øi 160	1"1/4
1000	850	1050	2183	1425	304	505	530	1030	1280	1295	1360	1420	1450	1595	1770	1770	Øi 160	1" 1/4